

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-21/0722
of 20 April 2023

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ",
"SLK-ALU-TTR", "SLK-ALU-TTQ"

Product family
to which the construction product belongs

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ",
"SLK-ALU-TTR", "SLK-ALU-TTQ" for the low thermal
bridging fixation of attachment parts in external thermal
insulation composite systems (ETICS) and other facade
systems.

Manufacturer

Dosteba GmbH
Aspenhastraße 6
72770 Reutlingen
DEUTSCHLAND

Manufacturing plant

Plant 1

This European Technical Assessment
contains

33 pages including 28 annexes which form an integral
part of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 040868-00-0404

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR" and "SLK-ALU-TTQ" correspond to product family a) of EAD 040868-00-0404¹.

The Heavy Load Corbels "SLK-ALU-TR" and "SLK-ALU-TQ" consists of

- a pressure distribution plate made of HPL
- alluminum extrusion profile for fixation off the attachment parts
- four polyamide tension bars for the force transmission
- two inner and two outer steel brackets with four steel retaining washers
- four polyamide injection feets for mounting on the substrate

The Heavy Load Corbels "SLK-ALU-TTR" and "SLK-ALU-TTQ" consists of

- a pressure distribution plate made of HPL
- alluminum extrusion profile for fixation off the attachment parts
- four polyamide tension bars for the force transmission
- two inner and two outer steel brackets
- a square steel tube
- four polyamide injection feets for pressure transfer to the outer wall
- two polyamide injection feets for mounting on the substrate

The components are joined at the factory and foamed to a box element using black rigid polyurethane foam. The Heavy Load Corbels have a thickness (cantilever distance) of 100 mm to 300 mm in increments of 20 mm. The dimensions are documented in Annexes A 3 - A 6.

Detailed information and data for all the components are provided in the annexes to this ETA and in the associated test reports and control plan. The components and the system setup of the product are provided in Annexes A 1 and A 2.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The heavy-load corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR" and "SLK-ALU-TTQ" are intended for use as a low thermal bridging fixation of primarily static loads from attachment parts such as awnings, canopies, stairways, railings, balconies, load bearing brackets and sun protection corbels on external walls with external thermal insulation composite systems (ETICS) or other facade systems.

The heavy-load corbels are fixed with their entire surface to the level, solid, load-bearing external wall (substrate) using two ("SLK-ALU-TTR" and "SLK-ALU-TTQ") or four ("SLK-ALU-TR" and "SLK-ALU-TQ") anchor corbels.

The performances given in Section 3 are only valid if the heavy load corbels are used in compliance with the specifications and conditions given in Annexes B.

¹ EAD 0040868-00-0404, edition June 2019 - RIGID POLYURETHANE FOAM (PUR) CORBELS FOR FASTENING ATTACHMENT PARTS IN EXTERNAL THERMAL INSULATION COMPOSITE SYSTEMS

The verifications and assessment methods on which this ETA is based lead to the assumption of a working life of heavy-load corbels of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|--------------------------|-----------------------------------|
| Reaction to fire | E in accordance with DIN EN 13501 |

3.2 Safety and accessibility in use (BWR 4)

| Essential characteristic | Performance | |
|--|---|-------------------------|
| Swelling in thickness after immersion in water | No performance assessed | |
| Apparent density of PU foam | See Annex C 2 – C 18 | |
| Mechanical resistance | Tensile strength | See Annex C 2 – C 18 |
| | Compressive strength | See Annex C 2 – C 18 |
| | Shear strength | See Annex C 2 – C 18 |
| | Lateral tensile strength | No performance assessed |
| | Flexural strength | No performance assessed |
| | Pull-through resistance of anchor corbels | No performance assessed |
| | Embedment strength (local bearing strength) of the anchorage area | No performance assessed |
| Influencing factors | See Annex C 1 | |

3.3 Energy economy and heat retention (BWR 6)

| Essential characteristic | Performance |
|--|---|
| Thermal conductivity | $\lambda < 0.0651 \text{ W/(mK)}^1$ with EN 12677 |
| Thermal resistance | No performance assessed |
| Thermal transmittance | No performance assessed |
| ¹ As a measured value which was not exceeded. | |

4 Assessment and verification of constancy of performance system applied, with reference to its legal basis

In accordance with European Assessment Document (EAD) no. 040868-00-0404, the following legal basis shall apply: 2003/640/EC.

The following system for the assessment and verification of constancy of performance (AVCP) shall be used for the heavy-load corbels: 2+ for all intended uses except for uses subject to reaction-to-fire requirements.

For intended uses subject to reaction-to-fire requirements, AVCP system 1, 3 or 4 shall be used for the reaction to fire, depending on the boundary conditions listed in the above-mentioned Decision.

5 Technical details necessary for the implementation of the AVCP system as provided for in the applicable EAD

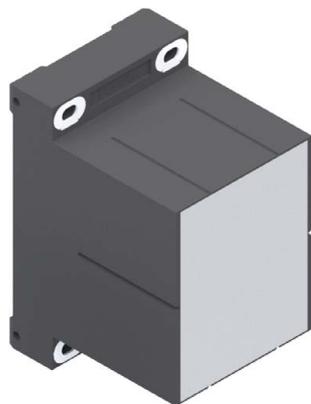
The technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with DIBt.

Issued in Berlin on 20 April 2023 by Deutsches Institut für Bautechnik

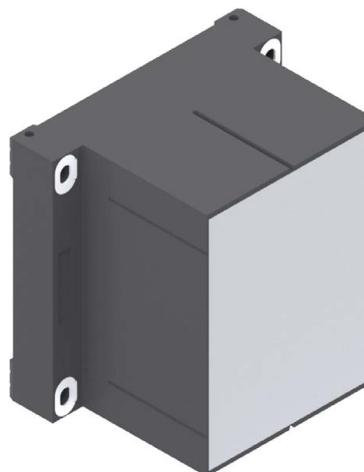
Renée Kamanzi-Fechner
Head of Section

beglaubigt:
Beckmann

Heavy Load Corbels SLK-ALU-TR and SLK-ALU-TQ

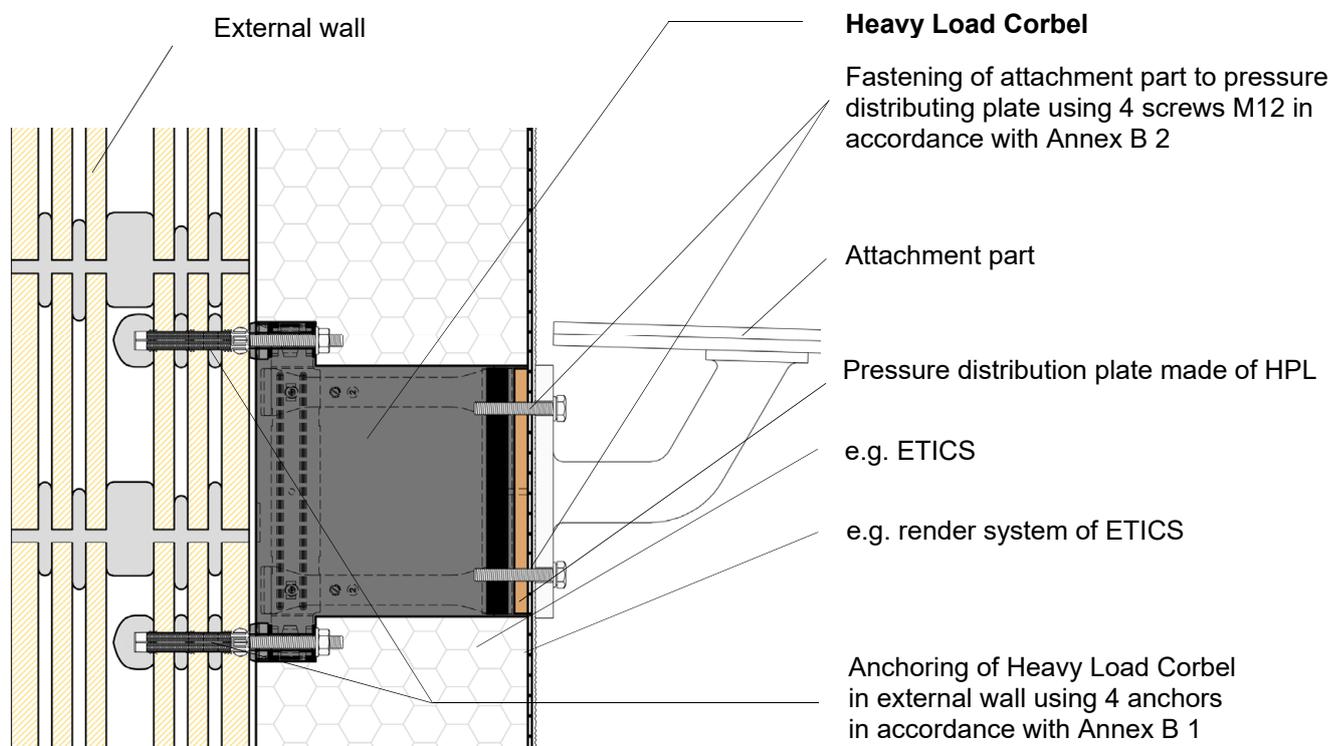


Heavy Load Corbel vertically installed
(Example SLK-ALU-TR)



Heavy Load Corbel horizontally installed
(Example SLK-ALU-TQ)

Installation situation using the example of a canopy

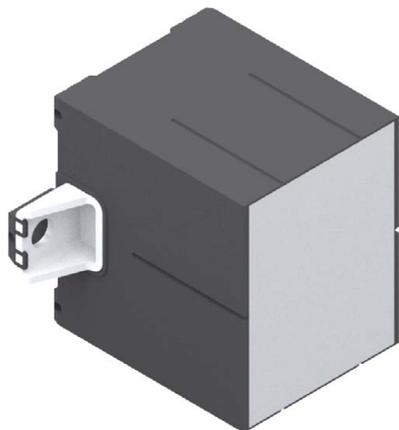


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

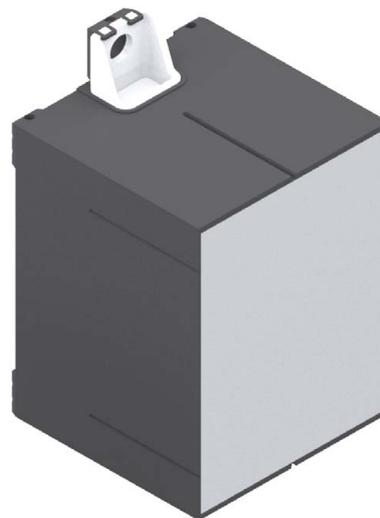
Product description
Product and installed condition of SLK-ALU-TR and SLK-ALU-TQ

Annex A 1

Heavy Load Corbels SLK-ALU-TTR and SLK-ALU-TTQ

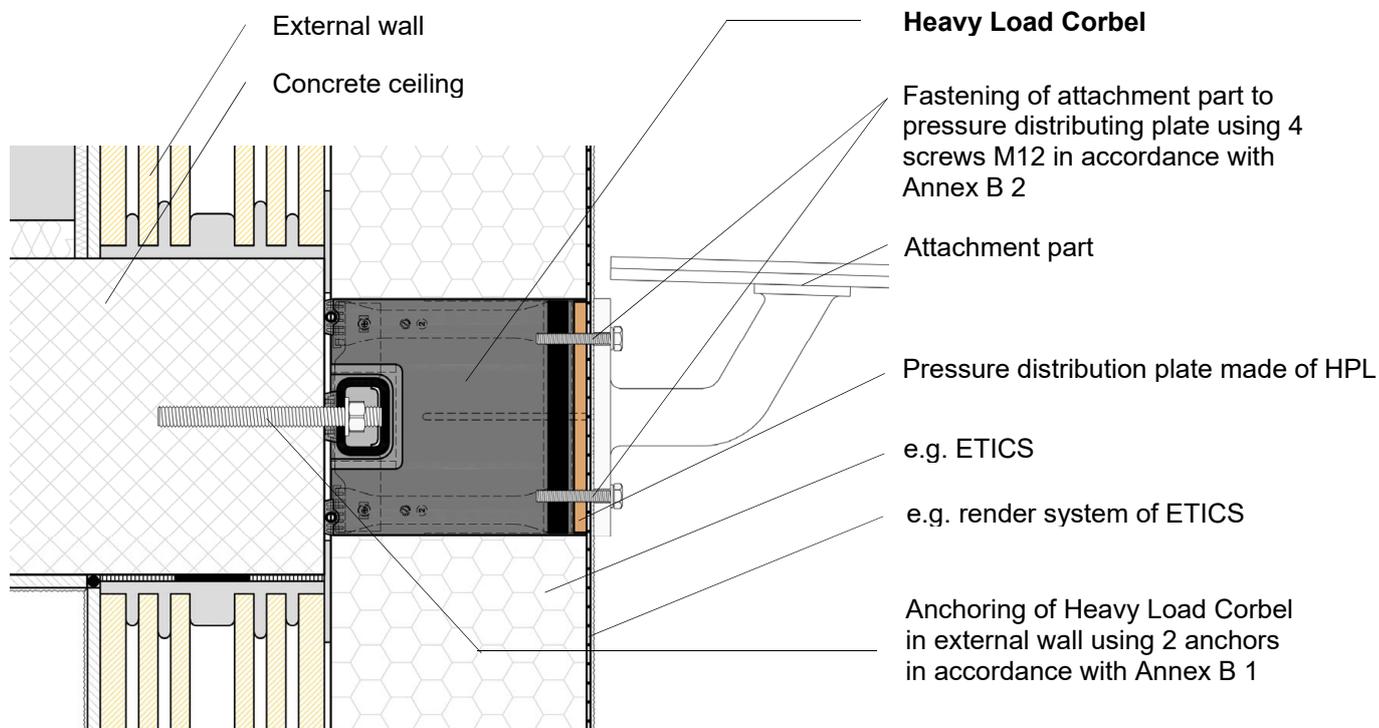


Heavy Load Corbel vertically installed
(Example SLK-ALU-TTR)



Heavy Load Corbel horizontally installed
(Example SLK-ALU-TTQ)

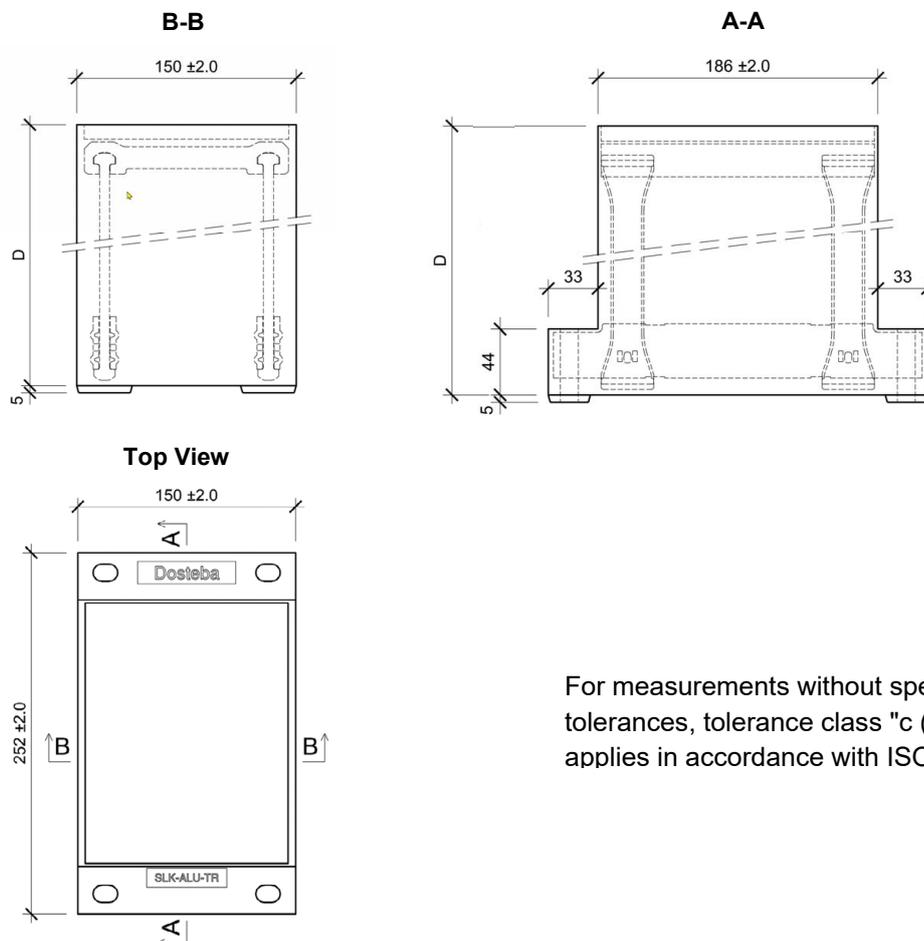
Installation situation using the example of a canopy



Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Product description
Product and installed condition of SLK-ALU-TTR and SLK-ALU-TTQ

Annex A 2



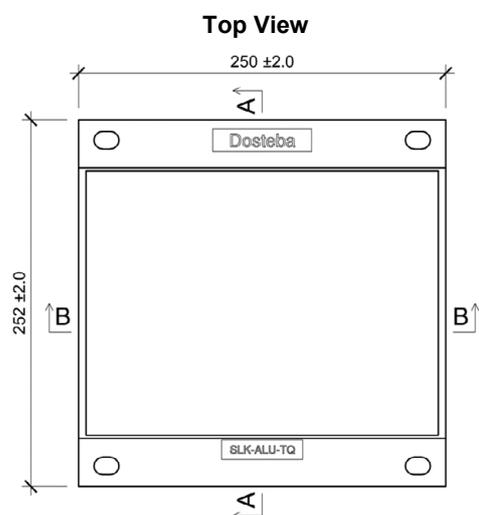
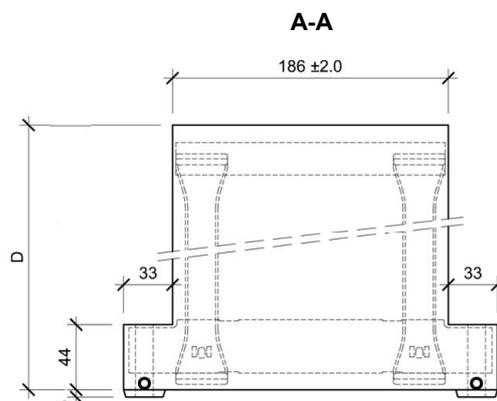
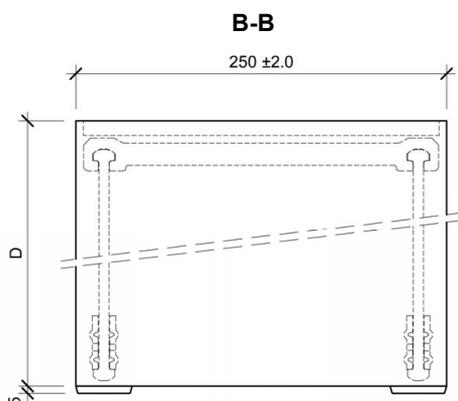
For measurements without specified tolerances, tolerance class "c (coarse)" applies in accordance with ISO 2768

| Description | D (mm) | Weight (g) | | |
|----------------|-----------|------------|---------------|------|
| | | -3% | Nominal value | + 3% |
| SLK-ALU-TR 100 | 100 | 3599 | 3710 | 3821 |
| SLK-ALU-TR 120 | 120 | 3802 | 3920 | 4038 |
| SLK-ALU-TR 140 | 140 | 4007 | 4131 | 4255 |
| SLK-ALU-TR 160 | 160 | 4212 | 4342 | 4472 |
| SLK-ALU-TR 180 | 180 | 4415 | 4552 | 4689 |
| SLK-ALU-TR 200 | 200 | 4620 | 4763 | 4906 |
| SLK-ALU-TR 220 | 220 | 4825 | 4974 | 5123 |
| SLK-ALU-TR 240 | 240 | 5029 | 5185 | 5341 |
| SLK-ALU-TR 260 | 260 | 5233 | 5395 | 5557 |
| SLK-ALU-TR 280 | 280 | 5438 | 5606 | 5774 |
| SLK-ALU-TR 300 | 300 | 5642 | 5817 | 5992 |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Product description
Outside dimensions and weight of SLK-ALU-TR

Annex A 3



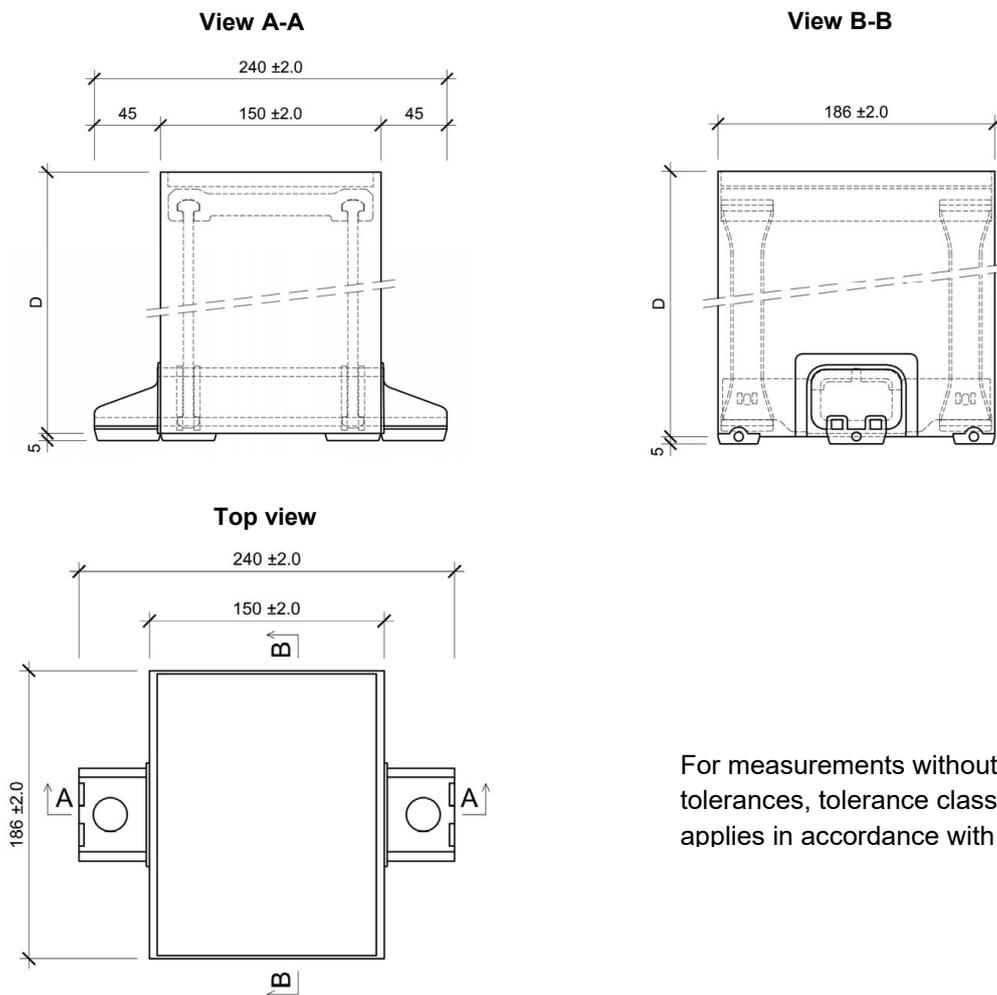
For measurements without specified tolerances, tolerance class "c (coarse)" applies in accordance with ISO 2768

| Description | D (mm) | Weight (g) | | |
|----------------|--------|------------|---------------|------|
| | | -3% | Nominal value | + 3% |
| SLK-ALU-TQ 100 | 100 | 5134 | 5293 | 5452 |
| SLK-ALU-TQ 120 | 120 | 5464 | 5633 | 5802 |
| SLK-ALU-TQ 140 | 140 | 5795 | 5974 | 6153 |
| SLK-ALU-TQ 160 | 160 | 6126 | 6315 | 6504 |
| SLK-ALU-TQ 180 | 180 | 6456 | 6656 | 6856 |
| SLK-ALU-TQ 200 | 200 | 6787 | 6997 | 7207 |
| SLK-ALU-TQ 220 | 220 | 7118 | 7338 | 7558 |
| SLK-ALU-TQ 240 | 240 | 7449 | 7679 | 7909 |
| SLK-ALU-TQ 260 | 260 | 7779 | 8020 | 8261 |
| SLK-ALU-TQ 280 | 280 | 8110 | 8361 | 8612 |
| SLK-ALU-TQ 300 | 300 | 8441 | 8702 | 8963 |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Product description
Outside dimensions and weight of SLK-ALU-TQ

Annex A 4



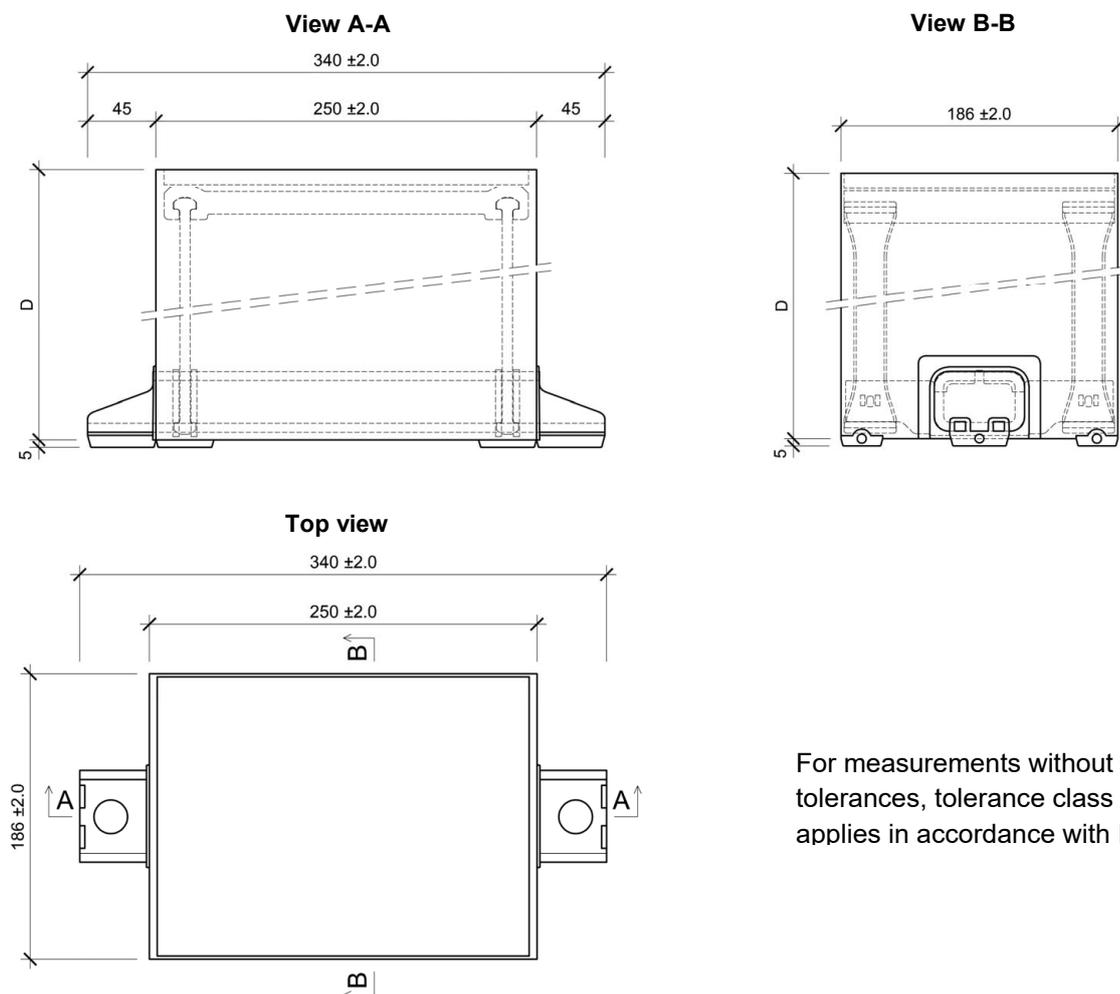
For measurements without specified tolerances, tolerance class "c (coarse)" applies in accordance with ISO 2768

| Description | D (mm) | Weight (g) | | |
|-----------------|--------|------------|---------------|------|
| | | -3% | Nominal value | + 3% |
| SLK-ALU-TTR 100 | 100 | 4189 | 4319 | 4449 |
| SLK-ALU-TTR 120 | 120 | 4393 | 4529 | 4665 |
| SLK-ALU-TTR 140 | 140 | 4598 | 4740 | 4882 |
| SLK-ALU-TTR 160 | 160 | 4802 | 4951 | 5100 |
| SLK-ALU-TTR 180 | 180 | 5006 | 5161 | 5316 |
| SLK-ALU-TTR 200 | 200 | 5211 | 5372 | 5533 |
| SLK-ALU-TTR 220 | 220 | 5416 | 5583 | 5750 |
| SLK-ALU-TTR 240 | 240 | 5620 | 5794 | 5968 |
| SLK-ALU-TTR 260 | 260 | 5824 | 6004 | 6184 |
| SLK-ALU-TTR 280 | 280 | 5059 | 5215 | 5371 |
| SLK-ALU-TTR 300 | 300 | 6233 | 6426 | 6619 |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Product description
Outside dimensions and weight of SLK-ALU-TTR

Annex A 5



For measurements without specified tolerances, tolerance class "c (coarse)" applies in accordance with ISO 2768

| Description | D (mm) | Weight (g) | | |
|-----------------|--------|------------|---------------|-------|
| | | -3% | Nominal value | + 3% |
| SLK-ALU-TTQ 100 | 100 | 6300 | 6495 | 6690 |
| SLK-ALU-TTQ 120 | 120 | 6631 | 6836 | 7041 |
| SLK-ALU-TTQ 140 | 140 | 6962 | 7177 | 7392 |
| SLK-ALU-TTQ 160 | 160 | 7291 | 7517 | 7743 |
| SLK-ALU-TTQ 180 | 180 | 7622 | 7858 | 8094 |
| SLK-ALU-TTQ 200 | 200 | 7953 | 8199 | 8445 |
| SLK-ALU-TTQ 220 | 220 | 8284 | 8540 | 8796 |
| SLK-ALU-TTQ 240 | 240 | 8615 | 8881 | 9147 |
| SLK-ALU-TTQ 260 | 260 | 8945 | 9222 | 9499 |
| SLK-ALU-TTQ 280 | 280 | 9276 | 9563 | 9850 |
| SLK-ALU-TTQ 300 | 300 | 9607 | 9904 | 10201 |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Product description
Outside dimensions and weight of SLK-ALU-TTQ

Annex A 6

Field of application

Product family a) heavy-load corbels in accordance with EAD 090868-00-0404

Loading of the Heavy Load Corbel

Static and quasi-static loads (primarily static loads) from attachment parts

Structural analysis

The verification of the Heavy Load Corbel as well as the anchoring and fastening shall consider all loads which occur. For each application case, a structural analysis shall be carried out for the ultimate limit state (ULS) and for the serviceability limit state (SLS). Relevant national regulations shall be observed.

For table C1 in Annex C 1:

The following loading durations shall be used:

- Self-weight (attachment parts, may also have to be considered here): permanent
- Imposed loads (traffic loads):

The actions of Clauses 6.3.1, 6.3.4 and 6.4 of EN 1991-1-1:2010-12 shall be considered as imposed loads. The actions listed in Clauses 6.3.2 and 6.3.3 of the standard shall be excluded.

Unless other values exist, the following loading durations shall be assumed:

- Loads in accordance with Clause 6.3.1: 25 % permanent; 75 % short
- Loads in accordance with Clause 6.3.4: short
- Loads in accordance with Clauses 6.4 (1) and 6.4 (2): medium
- Loads in accordance with Clauses 6.4 (NA.3)* to 6.4 (NA.6): permanent
- Wind loads: very short
- Snow loads: medium
- Extraordinary snow loads: short

The actions E_k shall be increased through multiplication by the influencing factors depending on the load scenario.

* acc. DIN EN 1991-1/NA:2010-12

Installation

The Heavy Load Corbels are fixed with their entire surface to the level, solid, load-bearing external wall (substrate) using anchor corbels as follows:

- SLK-ALU-TR, SLK-ALU-TQ: 4 anchor corbels diameter 10 mm
- SLK-ALU-TTR, SLK-ALU-TTQ: 2 anchor corbels diameter 16 mm

The anchoring corbels must be fit to use and have a strength class of at least 8.8 according to DIN EN ISO 898-1. The anchor corbels shall be inserted so they are perpendicular to the surface of the building. The load-bearing capacity of the anchoring corbels in the substrate must be verified for each individual case.

The attachment parts to the Heavy Load Corbel is always carried out symmetrically over the mounting surface (attachment surface of the add-on part) by means of four M12 screws according to Annex B 3 and B 4. The screws are connected to the pressure distribution plate and the aluminium extrusion profile.

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Intended use

Technical data – application and installation

Annex B 1

English translation prepared by DIBt

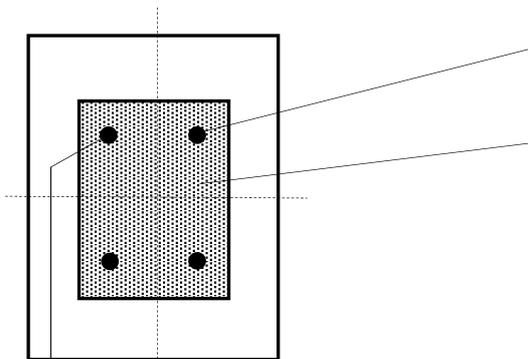
A blind hole connection with an embedment depth of at least 35 mm from the top edge of the pressure distribution plate is provided for this purpose. To fasten the attachment part to the Heavy Load Corbel M12 screws with a minimum strength class of 8.8 in accordance with EN ISO 898-1 shall be used.

The attachment parts are mounted directly on the pressure distribution plate or can be attached to the Heavy Load Corbel with a distance of maximum 20 mm between the attachment part and the pressure distribution plate. The specifications given in Annex B 2 regarding the fixation of the attachment parts shall be adhered to. Impact drivers shall not be used.

The following shall be observed when fastening the attachment parts:

- The attachment part shall be fastened at the pressure distribution plate according below pictured.
- Four M12 screws in accordance with Annex B 3 and B 4 shall be used for fastening.
- The installation depth from the upper edge of the pressure distribution plate shall be at least 35 mm.
- The blind hole shall be positioned perpendicular to the pressure distribution plate and can be created on-site or at the factory.
- The screw shall not be loosened.

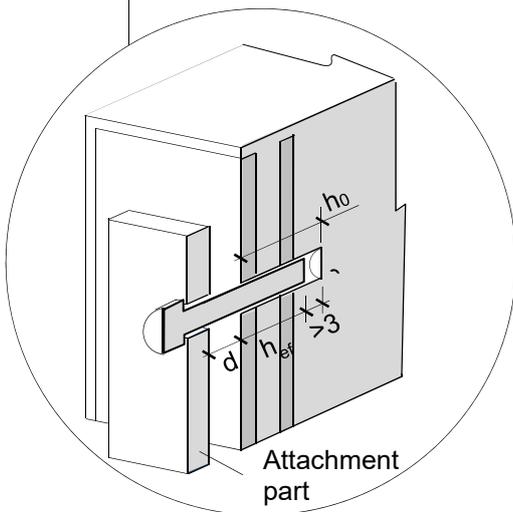
Fastening of attachment part



Attachment mounting part (adapter plate) 4 x M12, strength class of 8.8

Mounting surface of the load transfer of the attachment part

Dimensions of the mounting surface and arrangement of the screws according to Annex B 3 and B 4.



Blind hole:
 Drill hole: \varnothing 10.2 mm
 Drill hole depth h_0 : min. 38 mm
 Screw: M12, strength class of 8.8
 Setting depth h_{ef} : min. 35 mm
 Internal thread M12 on whole borehole
 Distance to attachment part: $d \leq 20$ mm

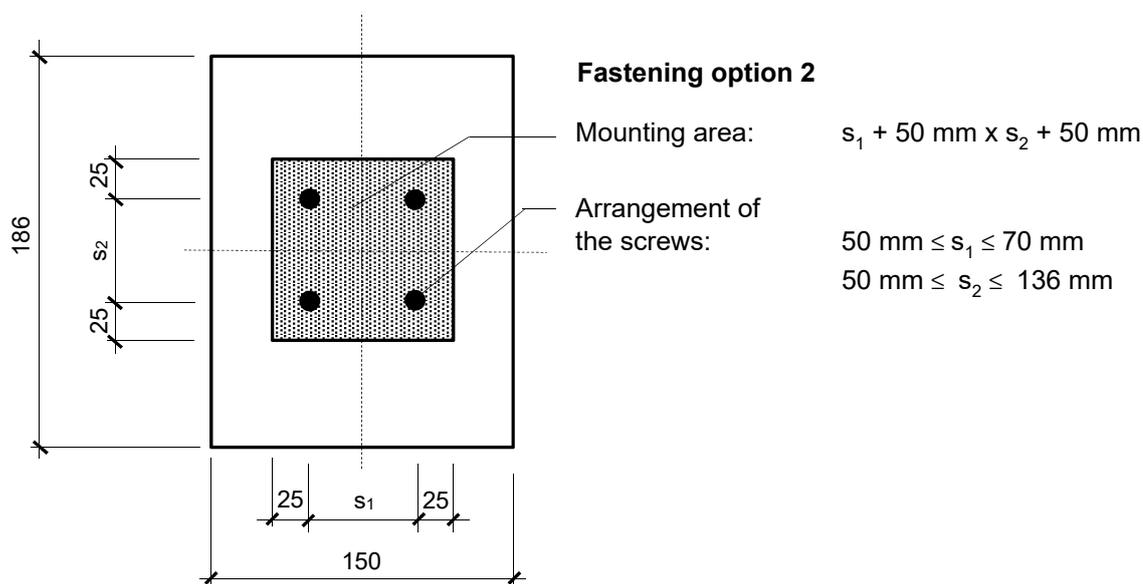
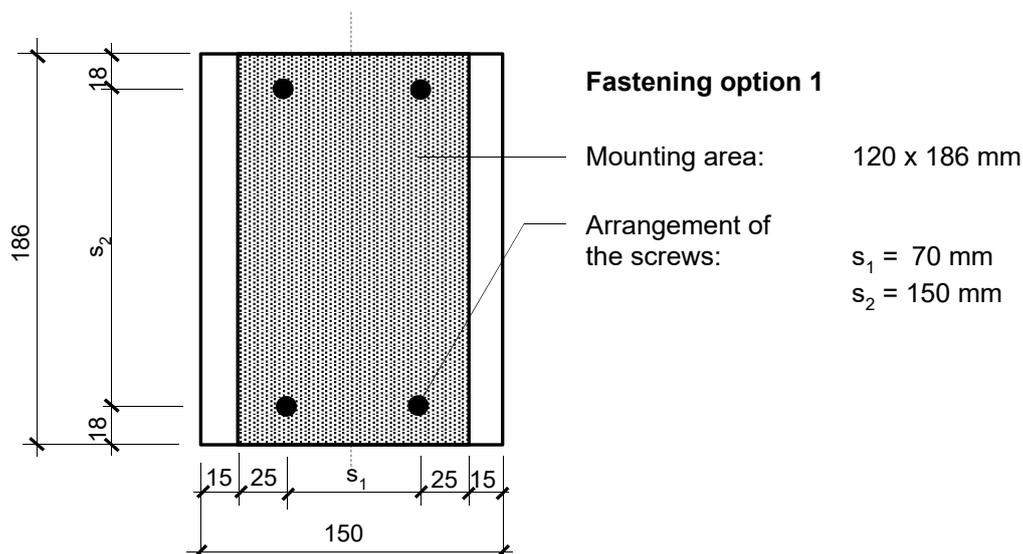
The verification of serviceability for non-load-bearing layer (plaster etc.) is not part of this approval

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Annex B 2

Intended use
 Technical data – application and installation

Fastening of the attachment part to the Heavy Load Corbel SLK-ALU-TR and SLK-ALU-TTR



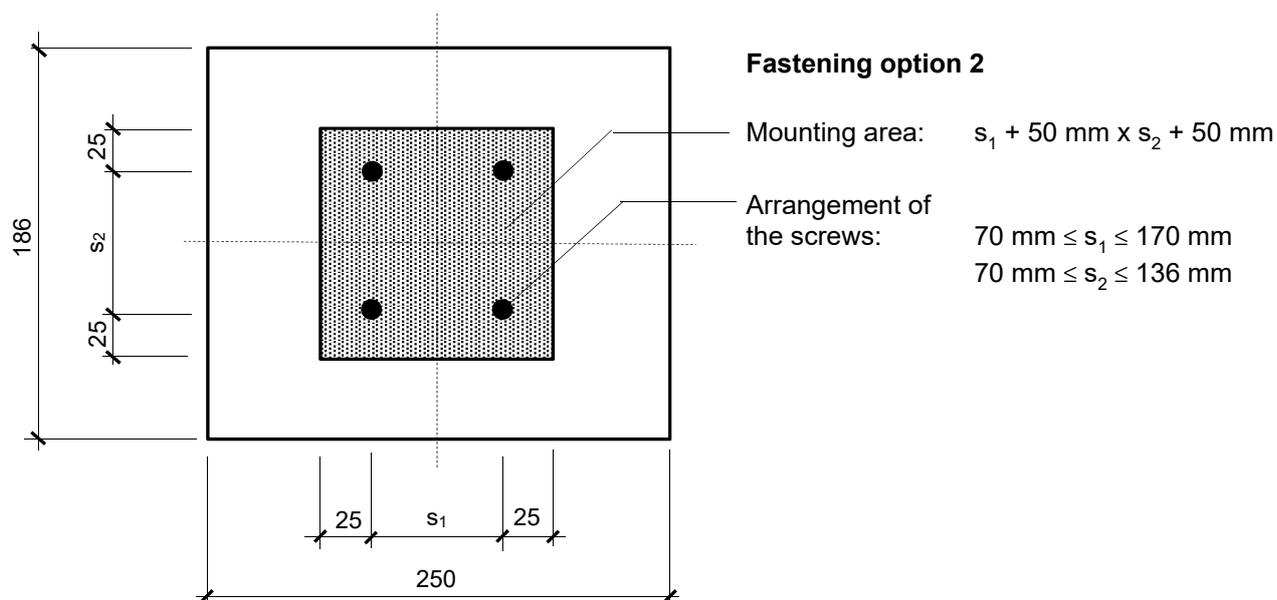
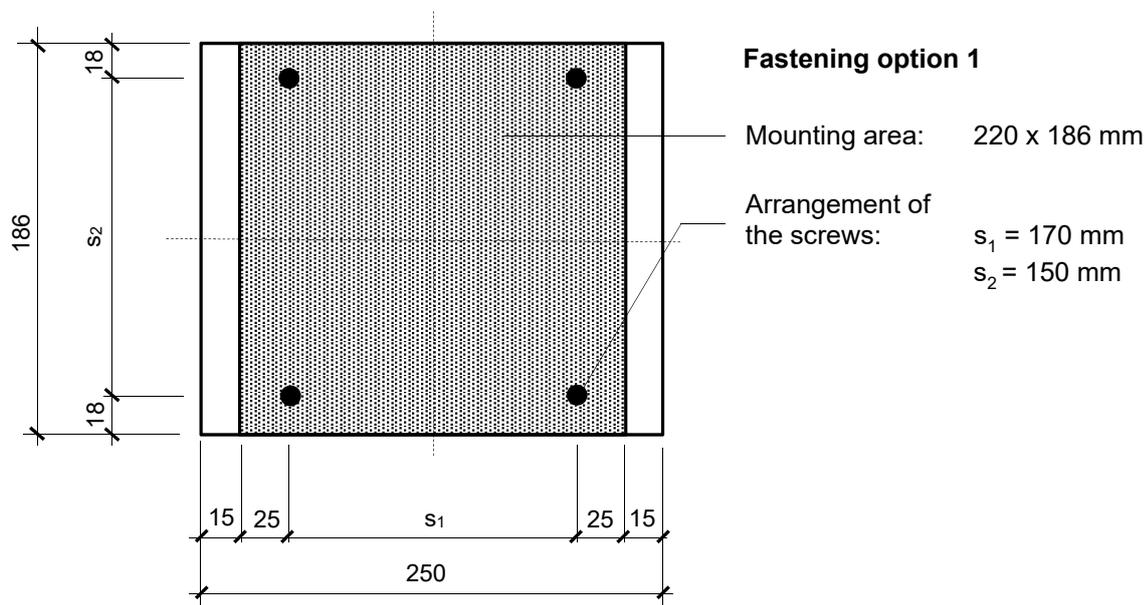
Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Intended use

Technical data – Fastening options of attachment part for SLK-ALU-TR and SLK-ALU-TTR

Annex B 3

Fastening of the attachment part to the Heavy Load Corbel SLK-ALU-TQ and SLK-ALU-TTQ



Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Intended use

Technical data – Fastening options of attachment part for SLK-ALU-TQ and SLK-ALU-TTQ

Annex B 4

Tab. C1: Influencing factors A_1 of duration of action

| Duration of load action | SLK-ALU-TR SLK-ALU-TQ | | SLK-ALU-TTR SLK-ALU-TTQ | |
|------------------------------|--------------------------|---------|----------------------------|---------|
| | A_1^f | A_1^E | A_1^f | A_1^E |
| very short | 1,00 | | 1,00 | |
| short up to one week | 1,35 | | 1,23 | 1,30 |
| medium up to three months | 1,45 | | 1,29 | 1,60 |
| Long to permanent | 1,65 | | 1,41 | 2,90 |

A_1^f : Influencing factor for the ultimate limit state (ULS)

A_1^E : Influencing factor for the serviceability limit state (SLS)

Tab. C2: Influencing factors for media, temperature and cyclic loading for SLK-ALU-TR and SLK-ALU-TQ

| | ULS Breakage | SLS Deflection |
|--|--------------|----------------|
| Influencing factor for media effects A_2 | 1,40 | 1,10 |
| Influencing factor for temperature effects A_3 for F_x (tension), F_y und M | | |
| - in summer, 80° | 1,20 | 1,10 |
| - in winter, -20° | 1,20 | 1,20 |
| Influencing factor for temperature effects A_3 für F_x (pressure) | | |
| - in summer, 80° | 2,10 | 1,10 |
| - in winter, -20° | 1,20 | 1,20 |
| Influencing factor for cyclic loading A_4 | 1,10 | 1,60 |

Tab. C3: Influencing factors for media, temperature and cyclic loading for SLK-ALU-TTR and SLK-ALU-TTQ

| | ULS Breakage | SLS Deflection |
|--|--------------|----------------|
| Influencing factor for media effects A_2 | 1,30 | 1,10 |
| Influencing factor for temperature effects A_3 for F_x (tension), F_y and M | | |
| - in summer, 80° | 1,20 | 1,10 |
| - in winter, -20° | 1,20 | 1,20 |
| Influencing factor for temperature effects A_3 for F_x (pressure) | | |
| - in summer, 80° | 2,10 | 1,10 |
| - in winter, -20° | 1,20 | 1,20 |
| Influencing factor for cyclic loading A_4 | 1,10 | 1,50 |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance
Influencing factors

Annex C 1

Fig. C1: Stress results for structural resistances F_x , F_y , F_z , M_y and M_z at the pressure distribution plate of the Heavy Load Corbel SLK-ALU-TR and SLK-ALU-TQ

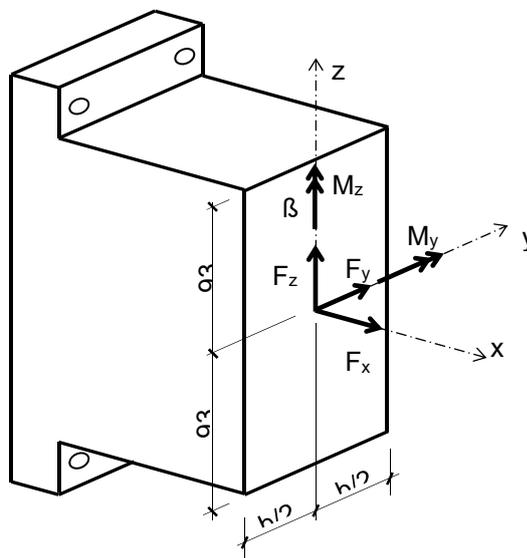
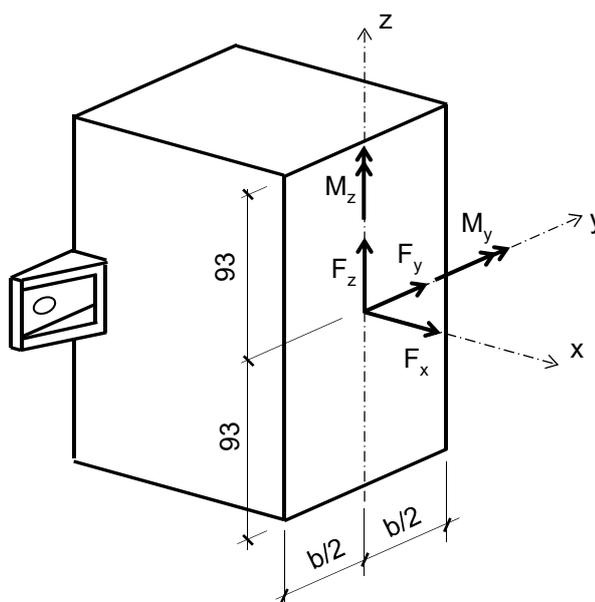


Fig. C2: Stress results for structural resistances F_x , F_y , F_z , M_y and M_z at the pressure distribution plate of the Heavy Load Corbel SLK-ALU-TTR and SLK-ALU-TTQ




Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"


Performance
Stress result directions of structural resistances

Annex C 2

Tab.C4: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TR without distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | |
|---|------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 82,0 | 343 | 35,5 | 62,4 | 5,45 | 6,00 |
| | 120 | | 342 | 33,7 | 57,0 | 5,36 | |
| | 140 | | 341 | 31,9 | 51,6 | 5,28 | |
| | 160 | | 340 | 30,0 | 46,2 | 5,19 | |
| | 180 | | 339 | 28,2 | 40,8 | 5,11 | |
| | 200 | | 338 | 26,4 | 35,4 | 5,02 | |
| | 220 | | 333 | 24,5 | 33,2 | 4,87 | |
| | 240 | | 329 | 22,6 | 30,9 | 4,71 | |
| | 260 | | 324 | 20,6 | 28,7 | 4,56 | |
| | 280 | | 320 | 18,7 | 26,4 | 4,40 | |
| | 300 | | 315 | 16,8 | 24,2 | 4,25 | |

Tab. C5: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TR without distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | | |
|---|------------|---------------------|----------|---|---------------------|----------------------|----------------------|------|
| | SLK-ALU-TR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] | |
| | | Tension | Pressure | | | | | |
|  | 100 | 72,3 | 0,0 | Compressive stress only on mounting area 186 mm x 150 mm | 30,7 | 52,7 | 4,70 | 5,63 |
| | 120 | | | | 29,1 | 48,1 | 4,63 | |
| | 140 | | | | 27,5 | 43,6 | 4,55 | |
| | 160 | | | | 26,0 | 39,0 | 4,48 | |
| | 180 | | | | 24,4 | 34,5 | 4,40 | |
| | 200 | | | | 22,8 | 29,9 | 4,33 | |
| | 220 | | | | 21,1 | 28,0 | 4,20 | |
| | 240 | | | | 19,5 | 26,1 | 4,07 | |
| | 260 | | | | 17,8 | 24,2 | 3,93 | |
| | 280 | | | | 16,2 | 22,3 | 3,80 | |
| | 300 | | | | 14,5 | 20,4 | 3,67 | |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TR without distance fixing

Annex C 3

Tab. C6: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TR with distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | |
|---|------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 82,0 | 343 | 31,5 | 55,4 | 5,45 | 5,74 |
| | 120 | | 342 | 29,9 | 50,6 | 5,36 | |
| | 140 | | 341 | 28,3 | 45,8 | 5,28 | |
| | 160 | | 340 | 26,6 | 41,0 | 5,19 | |
| | 180 | | 339 | 25,0 | 36,2 | 5,11 | |
| | 200 | | 338 | 23,4 | 33,5 | 5,02 | |
| | 220 | | 333 | 22,1 | 29,5 | 4,87 | |
| | 240 | | 329 | 20,7 | 27,4 | 4,71 | |
| | 260 | | 324 | 19,4 | 25,5 | 4,56 | |
| | 280 | | 320 | 18,0 | 23,4 | 4,40 | |
| | 300 | | 315 | 16,7 | 21,5 | 4,25 | |

Tab. C7: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TR with distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | | |
|---|------------|---------------------|----------|---|---------------------|----------------------|----------------------|------|
| | SLK-ALU-TR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] | |
| | | Tension | Pressure | | | | | |
|  | 100 | 72,3 | 0,0 | Compressive stress only on mounting area 186 mm x 150 mm | 30,7 | 52,7 | 4,70 | 5,63 |
| | 120 | | | | 29,1 | 48,1 | 4,63 | |
| | 140 | | | | 27,5 | 43,6 | 4,55 | |
| | 160 | | | | 26,0 | 39,0 | 4,48 | |
| | 180 | | | | 24,4 | 34,5 | 4,40 | |
| | 200 | | | | 22,8 | 29,9 | 4,33 | |
| | 220 | | | | 21,1 | 28,0 | 4,20 | |
| | 240 | | | | 19,5 | 26,1 | 4,07 | |
| | 260 | | | | 17,8 | 24,2 | 3,93 | |
| | 280 | | | | 16,2 | 22,3 | 3,80 | |
| | 300 | | | | 14,5 | 20,4 | 3,67 | |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TR with distance fixing

Annex C 4

Tab. C8: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TR without distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | | | |
|---|------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|------|------|
| | SLK-ALU-TR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] | | |
| | | Tension | Pressure | | | | | | |
|  | 100 | 41,0 | 172 | 12,0 | 22,5 | 2,50 | 3,70 | | |
| | 120 | | 162 | 11,3 | 20,6 | | | | |
| | 140 | | 151 | 10,5 | 18,6 | | | | |
| | 160 | | 141 | 9,78 | 16,7 | | | | |
| | 180 | | 131 | 9,04 | 14,7 | | | | |
| | 200 | | 120 | 8,30 | 12,8 | | | | |
| | 220 | | 116 | 7,36 | 11,5 | | | 2,28 | 3,46 |
| | 240 | | 113 | 6,42 | 10,2 | | | 2,05 | 3,22 |
| | 260 | | 109 | 5,48 | 8,94 | | | 1,83 | 2,98 |
| | 280 | | 105 | 4,54 | 7,65 | | | 1,60 | 2,74 |
| | 300 | | 102 | 3,60 | 6,36 | | | 1,38 | 2,50 |

Tab. C9: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TR without distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | | | | |
|---|------------|---------------------|----------|---|---------------------|----------------------|----------------------|------|------|------|
| | SLK-ALU-TR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] | | | |
| | | Tension | Pressure | | | | | | | |
|  | 100 | 39,6 | 0,0 | Compressive stress only on mounting area 186 mm x 150 mm | 10,3 | 21,4 | 2,22 | 2,62 | | |
| | 120 | | | | 9,66 | 19,6 | | | | |
| | 140 | | | | 9,02 | 17,7 | | | | |
| | 160 | | | | 8,38 | 15,9 | | | | |
| | 180 | | | | 7,74 | 14,0 | | | | |
| | 200 | | | | 7,10 | 12,2 | | | | |
| | 220 | | | | 6,30 | 11,0 | | | 2,02 | 2,45 |
| | 240 | | | | 5,49 | 9,74 | | | 1,82 | 2,28 |
| | 260 | | | | 4,69 | 8,52 | | | 1,63 | 2,11 |
| | 280 | | | | 3,88 | 7,29 | | | 1,43 | 1,94 |
| | 300 | | | | 3,08 | 6,06 | | | 1,23 | 1,77 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TR without distance fixing

Annex C 5

Tab. C10: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TR with distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | | | |
|---|------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|------|------|
| | SLK-ALU-TR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] | | |
| | | Tension | Pressure | | | | | | |
|  | 100 | 41,0 | 172 | 12,0 | 22,5 | 2,50 | 3,70 | | |
| | 120 | | 162 | 11,3 | 20,6 | | | | |
| | 140 | | 151 | 10,5 | 18,6 | | | | |
| | 160 | | 141 | 9,78 | 16,7 | | | | |
| | 180 | | 131 | 9,04 | 14,7 | | | | |
| | 200 | | 120 | 8,30 | 12,8 | | | | |
| | 220 | | 116 | 7,36 | 11,5 | | | 2,28 | 3,46 |
| | 240 | | 113 | 6,42 | 10,2 | | | 2,05 | 3,22 |
| | 260 | | 109 | 5,48 | 8,94 | | | 1,83 | 2,98 |
| | 280 | | 105 | 4,54 | 7,65 | | | 1,60 | 2,74 |
| | 300 | | 102 | 3,60 | 6,36 | | | 1,38 | 2,50 |

Tab. C11: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TR with distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | | | | |
|---|------------|---------------------|----------|---|---------------------|----------------------|----------------------|------|------|------|
| | SLK-ALU-TR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] | | | |
| | | Tension | Pressure | | | | | | | |
|  | 100 | 39,0 | 0,0 | Compressive stress only on mounting area 186 mm x 150 mm | 10,3 | 21,0 | 2,22 | 2,42 | | |
| | 120 | | | | 9,66 | 19,3 | | | | |
| | 140 | | | | 9,02 | 17,4 | | | | |
| | 160 | | | | 8,38 | 15,6 | | | | |
| | 180 | | | | 7,74 | 13,8 | | | | |
| | 200 | | | | 7,10 | 12,0 | | | | |
| | 220 | | | | 6,30 | 10,8 | | | 2,02 | 2,26 |
| | 240 | | | | 5,49 | 9,57 | | | 1,82 | 2,11 |
| | 260 | | | | 4,69 | 8,37 | | | 1,63 | 1,95 |
| | 280 | | | | 3,88 | 7,16 | | | 1,43 | 1,79 |
| | 300 | | | | 3,08 | 5,95 | | | 1,23 | 1,63 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TR with distance fixing

Annex C 6

Tab. C12: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TQ without distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | |
|---|------------|------------------|----------|------------------|------------------|-------------------|-------------------|
| | SLK-ALU-TQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 82,0 | 523 | 48,1 | 61,6 | 10,5 | 8,40 |
| | 120 | | 515 | 47,8 | 56,0 | 9,90 | 8,05 |
| | 140 | | 507 | 47,0 | 50,7 | 9,30 | 7,75 |
| | 160 | | 499 | 45,9 | 45,7 | 8,80 | 7,45 |
| | 180 | | 491 | 44,5 | 41,1 | 8,35 | 7,15 |
| | 200 | | 483 | 42,7 | 36,8 | 7,98 | 6,89 |
| | 220 | | 477 | 40,7 | 33,0 | 7,65 | 6,55 |
| | 240 | | 471 | 38,3 | 29,4 | 7,40 | 6,40 |
| | 260 | | 464 | 35,5 | 26,2 | 7,20 | 6,15 |
| | 280 | | 458 | 32,4 | 23,4 | 7,05 | 5,95 |
| | 300 | | 452 | 29,0 | 20,9 | 6,97 | 5,74 |

Tab. C13: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TQ without distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | | |
|---|------------|------------------|----------|---|------------------|-------------------|-------------------|------|
| | SLK-ALU-TQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] | |
| | | Tension | Pressure | | | | | |
|  | 100 | 82,0 | 0,0 | Compressive stress only on mounting area 186 mm x 220 mm | 46,0 | 58,6 | 10,3 | 7,84 |
| | 120 | | | | 45,8 | 53,2 | 9,72 | 7,51 |
| | 140 | | | | 45,0 | 48,2 | 9,14 | 7,23 |
| | 160 | | | | 43,9 | 43,4 | 8,65 | 6,95 |
| | 180 | | | | 42,6 | 39,0 | 8,20 | 6,67 |
| | 200 | | | | 40,9 | 35,0 | 7,84 | 6,43 |
| | 220 | | | | 39,0 | 31,4 | 7,52 | 6,11 |
| | 240 | | | | 36,7 | 28,0 | 7,27 | 5,97 |
| | 260 | | | | 34,0 | 24,9 | 7,07 | 5,74 |
| | 280 | | | | 31,0 | 22,2 | 6,93 | 5,55 |
| | 300 | | | | 27,8 | 19,9 | 6,85 | 5,36 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TQ without distance fixing

Annex C 7

Tab. C14: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TQ with distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | |
|---|------------|------------------|----------|------------------|------------------|-------------------|-------------------|
| | SLK-ALU-TQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 82,0 | 523 | 47,1 | 61,6 | 10,5 | 8,08 |
| | 120 | | 515 | 46,8 | 56,0 | 9,90 | 7,73 |
| | 140 | | 507 | 46,1 | 50,7 | 9,30 | 7,44 |
| | 160 | | 499 | 45,0 | 45,7 | 8,80 | 7,15 |
| | 180 | | 491 | 43,6 | 41,1 | 8,35 | 6,86 |
| | 200 | | 483 | 41,8 | 36,8 | 7,98 | 6,73 |
| | 220 | | 477 | 39,9 | 33,0 | 7,65 | 6,29 |
| | 240 | | 471 | 37,5 | 29,4 | 7,40 | 6,14 |
| | 260 | | 464 | 34,8 | 26,2 | 7,20 | 5,90 |
| | 280 | | 458 | 31,8 | 23,4 | 7,05 | 5,71 |
| | 300 | | 452 | 28,5 | 20,9 | 6,97 | 5,51 |

Tab. C15: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TQ with distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | | |
|---|------------|------------------|----------|---|------------------|-------------------|-------------------|------|
| | SLK-ALU-TQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] | |
| | | Tension | Pressure | | | | | |
|  | 100 | 82,0 | 0,0 | Compressive stress only on mounting area 186 mm x 220 mm | 46,0 | 58,6 | 10,3 | 7,76 |
| | 120 | | | | 45,8 | 53,2 | 9,72 | 7,43 |
| | 140 | | | | 45,0 | 48,2 | 9,14 | 7,16 |
| | 160 | | | | 43,9 | 43,4 | 8,65 | 6,88 |
| | 180 | | | | 42,6 | 39,0 | 8,20 | 6,60 |
| | 200 | | | | 40,9 | 35,0 | 7,84 | 6,37 |
| | 220 | | | | 39,0 | 31,4 | 7,52 | 6,05 |
| | 240 | | | | 36,7 | 28,0 | 7,27 | 5,91 |
| | 260 | | | | 34,0 | 24,9 | 7,07 | 5,68 |
| | 280 | | | | 31,0 | 22,2 | 6,93 | 5,49 |
| | 300 | | | | 27,8 | 19,9 | 6,85 | 5,31 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TQ with distance fixing

Annex C 8

Tab. C16: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TQ without distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | |
|---|------------|------------------|----------|------------------|------------------|-------------------|-------------------|
| | SLK-ALU-TQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 41,0 | 127 | 29,9 | 39,4 | 6,74 | 4,59 |
| | 120 | | | 29,1 | 35,7 | 6,70 | |
| | 140 | | | 28,2 | 32,3 | 6,70 | |
| | 160 | | | 27,4 | 29,2 | 6,65 | |
| | 180 | | | 26,5 | 26,5 | 6,55 | |
| | 200 | | | 25,6 | 24,1 | 6,45 | |
| | 220 | | 126 | 24,8 | 22,1 | 6,30 | 4,45 |
| | 240 | | | 23,9 | 20,4 | 6,20 | 4,30 |
| | 260 | | | 23,0 | 19,1 | 6,00 | 4,10 |
| | 280 | | | 22,1 | 18,1 | 5,85 | 3,85 |
| | 300 | | | 21,2 | 17,4 | 5,63 | 3,57 |

Tab. C17: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TQ without distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | | |
|---|------------|------------------|----------|---|------------------|-------------------|-------------------|------|
| | SLK-ALU-TQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] | |
| | | Tension | Pressure | | | | | |
|  | 100 | 41,0 | 0,0 | Compressive stress only on mounting area 186 mm x 220 mm | 26,5 | 35,6 | 6,07 | 4,48 |
| | 120 | | | | 25,8 | 32,3 | 6,04 | |
| | 140 | | | | 25,0 | 29,2 | 6,03 | |
| | 160 | | | | 24,3 | 26,4 | 5,99 | |
| | 180 | | | | 23,5 | 23,9 | 5,90 | |
| | 200 | | | | 22,7 | 21,8 | 5,81 | |
| | 220 | | | | 22,0 | 20,0 | 5,67 | 4,34 |
| | 240 | | | | 21,1 | 18,4 | 5,58 | 4,20 |
| | 260 | | | | 20,4 | 17,3 | 5,40 | 4,00 |
| | 280 | | | | 19,6 | 16,4 | 5,27 | 3,76 |
| | 300 | | | | 18,9 | 15,7 | 5,07 | 3,48 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TQ without distance fixing

Annex C 9

Tab. C18: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TQ with distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | |
|---|------------|------------------|----------|------------------|------------------|-------------------|-------------------|
| | SLK-ALU-TQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 41,0 | 127 | 28,2 | 38,2 | 6,65 | 4,59 |
| | 120 | | | 27,2 | 34,6 | 6,61 | |
| | 140 | | | 26,1 | 31,3 | 6,57 | |
| | 160 | | | 25,1 | 28,3 | 6,53 | |
| | 180 | | | 24,0 | 25,7 | 6,49 | |
| | 200 | | | 23,0 | 24,1 | 6,45 | |
| | 220 | | 126 | 22,6 | 21,4 | 6,24 | 4,45 |
| | 240 | | | 22,1 | 19,8 | 6,03 | 4,30 |
| | 260 | | | 21,7 | 18,5 | 5,81 | 4,10 |
| | 280 | | | 21,2 | 17,5 | 5,60 | 3,85 |
| | 300 | | | 20,8 | 17,1 | 5,39 | 3,57 |

Tab. C19: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TQ with distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | | |
|---|------------|------------------|----------|---|------------------|-------------------|-------------------|------|
| | SLK-ALU-TQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] | |
| | | Tension | Pressure | | | | | |
|  | 100 | 41,0 | 0,0 | Compressive stress only on mounting area 186 mm x 220 mm | 24,5 | 35,6 | 6,07 | 4,48 |
| | 120 | | | | 23,9 | 32,3 | 6,04 | |
| | 140 | | | | 23,1 | 29,2 | 6,03 | |
| | 160 | | | | 22,5 | 26,4 | 5,99 | |
| | 180 | | | | 21,7 | 23,9 | 5,90 | |
| | 200 | | | | 21,0 | 21,8 | 5,81 | |
| | 220 | | | | 20,4 | 20,0 | 5,67 | 4,34 |
| | 240 | | | | 19,5 | 18,4 | 5,58 | 4,20 |
| | 260 | | | | 18,9 | 17,3 | 5,40 | 4,00 |
| | 280 | | | | 18,1 | 16,4 | 5,27 | 3,76 |
| | 300 | | | | 17,5 | 15,7 | 5,07 | 3,48 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TQ with distance fixing

Annex C 10

Tab. C20: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTR without distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | |
|---|-------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 78,5 | 204 | 40,4 | 33,8 | 4,73 | 6,16 |
| | 120 | 79,6 | 208 | 37,4 | 32,1 | 4,74 | 6,12 |
| | 140 | 80,7 | 213 | 34,5 | 30,4 | 4,75 | 6,08 |
| | 160 | 81,8 | 217 | 31,5 | 28,8 | 4,75 | 6,03 |
| | 180 | 82,9 | 222 | 28,6 | 27,1 | 4,76 | 5,99 |
| | 200 | 84,0 | 227 | 25,6 | 25,4 | 4,77 | 5,95 |
| | 220 | 83,7 | 222 | 24,3 | 24,4 | 4,67 | 5,83 |
| | 240 | 83,4 | 217 | 23,0 | 23,3 | 4,57 | 5,70 |
| | 260 | 83,1 | 213 | 21,7 | 22,2 | 4,47 | 5,58 |
| | 280 | 82,8 | 208 | 20,4 | 21,2 | 4,37 | 5,45 |
| | 300 | 82,5 | 204 | 19,0 | 20,1 | 4,27 | 5,33 |

Tab. C21: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTR without distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | |
|---|-------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
|  | 100 | 70,6 | 204 | 36,4 | 27,0 | 4,26 | 5,54 |
| | 120 | 71,6 | 208 | 33,7 | 25,4 | 4,24 | 5,46 |
| | 140 | 72,6 | 213 | 31,0 | 23,8 | 4,22 | 5,38 |
| | 160 | 73,6 | 217 | 28,4 | 22,2 | 4,19 | 5,30 |
| | 180 | 74,6 | 222 | 25,7 | 20,7 | 4,17 | 5,22 |
| | 200 | 75,6 | 227 | 23,0 | 19,1 | 4,15 | 5,14 |
| | 220 | 75,3 | 222 | 21,9 | 18,5 | 4,09 | 5,07 |
| | 240 | 75,1 | 217 | 20,7 | 17,9 | 4,03 | 5,00 |
| | 260 | 74,8 | 213 | 19,5 | 17,3 | 3,96 | 4,93 |
| | 280 | 74,5 | 208 | 18,3 | 16,7 | 3,90 | 4,86 |
| | 300 | 74,2 | 204 | 17,1 | 16,1 | 3,84 | 4,79 |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance

Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TTR without distance fixing

Annex C 11

Tab. C22: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTR with distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | |
|--|-------------|---------------------|----------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | 100 | 78,5 | 204 | 34,4 | 40,8 | 5,01 | 6,47 |
| | 120 | 79,6 | 208 | 32,3 | 37,2 | 4,84 | 6,37 |
| | 140 | 80,7 | 213 | 30,3 | 33,6 | 4,67 | 6,27 |
| | 160 | 81,8 | 217 | 28,2 | 30,1 | 4,51 | 6,17 |
| | 180 | 82,9 | 222 | 26,1 | 26,5 | 4,34 | 6,07 |
| | 200 | 84,0 | 227 | 24,1 | 22,9 | 4,17 | 5,97 |
| | 220 | 83,7 | 222 | 22,5 | 22,0 | 4,21 | 5,84 |
| | 240 | 83,4 | 217 | 20,8 | 21,0 | 4,26 | 5,72 |
| | 260 | 83,1 | 213 | 19,2 | 20,0 | 4,30 | 5,59 |
| | 280 | 82,8 | 208 | 17,6 | 19,1 | 4,35 | 5,47 |
| | 300 | 82,5 | 204 | 16,0 | 18,1 | 4,39 | 5,34 |

Tab. C23: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTR with distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | |
|--|-------------|-------------------|----------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,R}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | 100 | 70,6 | 204 | 30,9 | 36,7 | 4,51 | 5,82 |
| | 120 | 71,6 | 208 | 28,9 | 33,5 | 4,36 | 5,73 |
| | 140 | 72,6 | 213 | 26,8 | 30,3 | 4,21 | 5,64 |
| | 160 | 73,6 | 217 | 24,8 | 27,0 | 4,05 | 5,55 |
| | 180 | 74,6 | 222 | 22,7 | 23,8 | 3,90 | 5,46 |
| | 200 | 75,6 | 227 | 20,7 | 20,6 | 3,75 | 5,37 |
| | 220 | 75,3 | 222 | 19,4 | 19,8 | 3,79 | 5,26 |
| | 240 | 75,1 | 217 | 18,1 | 18,9 | 3,83 | 5,15 |
| | 260 | 74,8 | 213 | 16,9 | 18,0 | 3,87 | 5,03 |
| | 280 | 74,5 | 208 | 15,6 | 17,2 | 3,91 | 4,92 |
| | 300 | 74,2 | 204 | 14,4 | 16,3 | 3,95 | 4,81 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TTR with distance fixing

Annex C 12

Tab. C24: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTR without distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | |
|---|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 39,2 | 102 | 20,2 | 16,9 |
| | 120 | 39,8 | 104 | 18,7 | 16,0 | 2,37 | 3,06 |
| | 140 | 40,3 | 106 | 17,2 | 15,2 | 2,38 | 3,04 |
| | 160 | 40,9 | 108 | 15,7 | 14,4 | 2,38 | 3,01 |
| | 180 | 41,4 | 111 | 14,3 | 13,5 | 2,39 | 2,99 |
| | 200 | 42,0 | 113 | 12,8 | 12,7 | 2,39 | 2,97 |
| | 220 | 41,8 | 111 | 12,1 | 12,2 | 2,34 | 2,91 |
| | 240 | 41,7 | 108 | 11,5 | 11,6 | 2,29 | 2,85 |
| | 260 | 41,5 | 106 | 10,8 | 11,1 | 2,24 | 2,78 |
| | 280 | 41,4 | 104 | 10,2 | 10,6 | 2,19 | 2,72 |
| | 300 | 41,2 | 102 | 9,55 | 10,0 | 2,14 | 2,66 |

Tab. C25: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTR without distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | |
|---|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 35,3 | 102 | 18,2 | 13,5 |
| | 120 | 35,8 | 104 | 16,8 | 12,7 | 2,12 | 2,73 |
| | 140 | 36,3 | 106 | 15,5 | 11,9 | 2,11 | 2,69 |
| | 160 | 36,8 | 108 | 14,2 | 11,1 | 2,09 | 2,65 |
| | 180 | 37,3 | 111 | 12,8 | 10,3 | 2,08 | 2,61 |
| | 200 | 37,8 | 113 | 11,5 | 9,55 | 2,07 | 2,57 |
| | 220 | 37,6 | 111 | 10,9 | 9,25 | 2,04 | 2,54 |
| | 240 | 37,5 | 108 | 10,3 | 8,95 | 2,01 | 2,50 |
| | 260 | 37,4 | 106 | 9,77 | 8,66 | 1,98 | 2,47 |
| | 280 | 37,2 | 104 | 9,18 | 8,36 | 1,95 | 2,43 |
| | 300 | 37,1 | 102 | 8,59 | 8,06 | 1,92 | 2,40 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TTR without distance fixing

Annex C 13

Tab. C26: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTR with distance fixing Fastening option 1 (according Annex B 3)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | |
|--|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 39,2 | 102 | 17,2 | 20,4 |
| | 120 | 39,8 | 104 | 16,1 | 18,6 | 2,43 | 3,19 |
| | 140 | 40,3 | 106 | 15,1 | 16,8 | 2,34 | 3,14 |
| | 160 | 40,9 | 108 | 14,1 | 15,0 | 2,26 | 3,08 |
| | 180 | 41,4 | 111 | 13,0 | 13,2 | 2,17 | 3,03 |
| | 200 | 42,0 | 113 | 12,0 | 11,4 | 2,09 | 2,98 |
| | 220 | 41,8 | 111 | 11,2 | 11,0 | 2,11 | 2,92 |
| | 240 | 41,7 | 108 | 10,4 | 10,5 | 2,13 | 2,86 |
| | 260 | 41,5 | 106 | 9,62 | 10,0 | 2,15 | 2,79 |
| | 280 | 41,4 | 104 | 8,81 | 9,56 | 2,17 | 2,73 |
| | 300 | 41,2 | 102 | 8,00 | 9,08 | 2,19 | 2,67 |

Tab. C27: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTR with distance fixing Fastening option 2 (according Annex B 3)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | |
|--|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTR | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 35,3 | 102 | 15,4 | 18,3 |
| | 120 | 35,8 | 104 | 14,4 | 16,7 | 2,18 | 2,87 |
| | 140 | 36,3 | 106 | 13,4 | 15,1 | 2,11 | 2,82 |
| | 160 | 36,8 | 108 | 12,4 | 13,5 | 2,03 | 2,78 |
| | 180 | 37,3 | 111 | 11,3 | 11,9 | 1,96 | 2,73 |
| | 200 | 37,8 | 113 | 10,3 | 10,3 | 1,88 | 2,69 |
| | 220 | 37,6 | 111 | 9,72 | 9,91 | 1,90 | 2,63 |
| | 240 | 37,5 | 108 | 9,09 | 9,47 | 1,92 | 2,57 |
| | 260 | 37,4 | 106 | 8,46 | 9,04 | 1,93 | 2,52 |
| | 280 | 37,2 | 104 | 7,83 | 8,60 | 1,95 | 2,46 |
| | 300 | 37,1 | 102 | 7,20 | 8,17 | 1,97 | 2,40 |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TTR with distance fixing

Annex C 14

Tab. C28: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTQ without distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | |
|---|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 88,5 | 203 | 67,4 | 44,1 |
| 120 | 88,4 | 207 | 62,9 | 40,4 | 9,11 | 6,39 | |
| 140 | 88,4 | 212 | 58,4 | 36,7 | 8,85 | 6,25 | |
| 160 | 88,3 | 216 | 54,0 | 33,0 | 8,58 | 6,10 | |
| 180 | 88,2 | 221 | 49,5 | 29,3 | 8,32 | 5,96 | |
| 200 | 88,2 | 226 | 45,0 | 25,6 | 8,06 | 5,81 | |
| 220 | 86,3 | 221 | 42,3 | 25,3 | 7,99 | 5,81 | |
| 240 | 84,5 | 216 | 39,6 | 25,1 | 7,92 | 5,81 | |
| 260 | 82,6 | 212 | 36,8 | 24,8 | 7,85 | 5,80 | |
| 280 | 80,8 | 207 | 34,1 | 24,5 | 7,78 | 5,80 | |
| 300 | 78,9 | 203 | 31,4 | 24,2 | 7,71 | 5,80 | |

Tab. C29: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTQ without distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances R_k for ULS without distance fixing | | | | | | | |
|---|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 79,6 | 203 | 60,7 | 39,7 |
| 120 | 79,6 | 207 | 56,1 | 36,2 | 8,20 | 5,75 | |
| 140 | 79,5 | 212 | 51,5 | 32,8 | 7,96 | 5,62 | |
| 160 | 79,4 | 216 | 46,9 | 29,3 | 7,73 | 5,49 | |
| 180 | 79,3 | 221 | 42,3 | 25,9 | 7,49 | 5,36 | |
| 200 | 79,3 | 226 | 37,7 | 22,4 | 7,25 | 5,23 | |
| 220 | 77,6 | 221 | 35,8 | 22,3 | 7,19 | 5,23 | |
| 240 | 76,0 | 216 | 33,9 | 22,2 | 7,13 | 5,23 | |
| 260 | 74,3 | 212 | 32,0 | 22,0 | 7,06 | 5,22 | |
| 280 | 72,7 | 207 | 30,1 | 21,9 | 7,00 | 5,22 | |
| 300 | 71,0 | 203 | 28,2 | 21,8 | 6,94 | 5,22 | |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TTQ without distance fixing

Annex C 15

Tab. C30: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTQ with distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | |
|--|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 88,5 | 203 | 51,8 | 51,7 |
| 120 | 88,4 | 207 | 49,4 | 46,9 | 9,05 | 6,77 | |
| 140 | 88,4 | 212 | 46,9 | 42,1 | 8,71 | 6,62 | |
| 160 | 88,3 | 216 | 44,5 | 37,3 | 8,38 | 6,47 | |
| 180 | 88,2 | 221 | 42,0 | 32,6 | 8,04 | 6,32 | |
| 200 | 88,2 | 226 | 39,6 | 27,8 | 7,70 | 6,17 | |
| 220 | 86,3 | 221 | 37,5 | 26,8 | 7,83 | 6,01 | |
| 240 | 84,5 | 216 | 35,4 | 25,8 | 7,96 | 5,84 | |
| 260 | 82,6 | 212 | 33,2 | 24,8 | 8,09 | 5,68 | |
| 280 | 80,8 | 207 | 31,1 | 23,8 | 8,22 | 5,51 | |
| 300 | 78,9 | 203 | 29,0 | 22,8 | 8,35 | 5,35 | |

Tab. C31: Characteristic structural resistances R_k for the ultimate limit state (ULS) of the SLK-ALU-TTQ with distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances R_k for ULS with distance fixing | | | | | | | |
|--|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,R,k}$ [kN] | | $F_{y,R,k}$ [kN] | $F_{z,R,k}$ [kN] | $M_{z,R,k}$ [kNm] | $M_{y,R,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 79,6 | 203 | 46,6 | 46,5 |
| 120 | 79,6 | 207 | 44,4 | 41,9 | 7,39 | 6,09 | |
| 140 | 79,5 | 212 | 42,2 | 37,3 | 7,28 | 5,96 | |
| 160 | 79,4 | 216 | 40,0 | 32,7 | 7,16 | 5,82 | |
| 180 | 79,3 | 221 | 37,8 | 28,1 | 7,05 | 5,69 | |
| 200 | 79,3 | 226 | 35,6 | 23,5 | 6,93 | 5,55 | |
| 220 | 77,6 | 221 | 33,7 | 22,9 | 6,88 | 5,40 | |
| 240 | 76,0 | 216 | 31,8 | 22,3 | 6,83 | 5,25 | |
| 260 | 74,3 | 212 | 29,9 | 21,7 | 6,78 | 5,11 | |
| 280 | 72,7 | 207 | 28,0 | 21,1 | 6,73 | 4,96 | |
| 300 | 71,0 | 203 | 26,1 | 20,5 | 6,68 | 4,81 | |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances R_k for the ultimate limit state (ULS) of SLK-ALU-TTQ with distance fixing

Annex C 16

Tab. C32: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTQ without distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | |
|---|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 44,2 | 101 | 33,7 | 22,0 |
| 120 | 44,2 | 103 | 31,4 | 20,2 | 4,56 | 3,20 | |
| 140 | 44,2 | 105 | 29,2 | 18,3 | 4,43 | 3,13 | |
| 160 | 44,1 | 108 | 27,0 | 16,5 | 4,29 | 3,05 | |
| 180 | 44,1 | 110 | 24,7 | 14,6 | 4,16 | 2,98 | |
| 200 | 44,1 | 113 | 22,5 | 12,8 | 4,03 | 2,91 | |
| 220 | 43,1 | 110 | 21,1 | 12,6 | 3,99 | 2,91 | |
| 240 | 42,2 | 108 | 19,8 | 12,5 | 3,96 | 2,91 | |
| 260 | 41,3 | 105 | 18,4 | 12,4 | 3,92 | 2,90 | |
| 280 | 40,4 | 103 | 17,0 | 12,2 | 3,89 | 2,90 | |
| 300 | 39,4 | 101 | 15,7 | 12,1 | 3,85 | 2,90 | |

Tab. C33: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTQ without distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances C_k for SLS without distance fixing | | | | | | | |
|---|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 39,8 | 101 | 30,3 | 19,8 |
| 120 | 39,8 | 103 | 28,0 | 18,1 | 4,10 | 2,87 | |
| 140 | 39,7 | 105 | 25,7 | 16,4 | 3,98 | 2,81 | |
| 160 | 39,7 | 108 | 23,4 | 14,7 | 3,87 | 2,74 | |
| 180 | 39,6 | 110 | 21,1 | 12,9 | 3,75 | 2,68 | |
| 200 | 39,6 | 113 | 18,8 | 11,2 | 3,63 | 2,61 | |
| 220 | 38,8 | 110 | 17,9 | 11,1 | 3,60 | 2,61 | |
| 240 | 38,0 | 108 | 16,9 | 11,1 | 3,57 | 2,61 | |
| 260 | 37,1 | 105 | 16,0 | 11,0 | 3,53 | 2,61 | |
| 280 | 36,3 | 103 | 15,0 | 10,9 | 3,50 | 2,61 | |
| 300 | 35,5 | 101 | 14,1 | 10,9 | 3,47 | 2,61 | |


Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance


Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALU-TTQ without distance fixing

Annex C 17

Tab. C34: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTQ with distance fixing Fastening option 1 (according Annex B 4)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | |
|--|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 44,2 | 101 | 25,9 | 25,8 |
| 120 | 44,2 | 103 | 24,7 | 23,4 | 4,52 | 3,39 | |
| 140 | 44,2 | 105 | 23,4 | 21,0 | 4,35 | 3,31 | |
| 160 | 44,1 | 108 | 22,2 | 18,6 | 4,19 | 3,24 | |
| 180 | 44,1 | 110 | 21,0 | 16,3 | 4,02 | 3,16 | |
| 200 | 44,1 | 113 | 19,8 | 13,9 | 3,85 | 3,09 | |
| 220 | 43,1 | 110 | 18,7 | 13,4 | 3,92 | 3,01 | |
| 240 | 42,2 | 108 | 17,7 | 12,9 | 3,98 | 2,92 | |
| 260 | 41,3 | 105 | 16,6 | 12,4 | 4,05 | 2,84 | |
| 280 | 40,4 | 103 | 15,5 | 11,9 | 4,11 | 2,75 | |
| 300 | 39,4 | 101 | 14,5 | 11,4 | 4,18 | 2,67 | |

Tab. C35: Characteristic structural resistances C_k for the serviceability limit state (SLS) of the SLK-ALU-TTQ with distance fixing Fastening option 2 (according Annex B 4)

| Characteristic structural resistances C_k for SLS with distance fixing | | | | | | | |
|--|-------------|---|------------|---------------------|---------------------|----------------------|----------------------|
| | SLK-ALU-TTQ | $F_{x,C,k}$ [kN] | | $F_{y,C,k}$ [kN] | $F_{z,C,k}$ [kN] | $M_{z,C,k}$ [kNm] | $M_{y,C,k}$ [kNm] |
| | | Tension | Pressure | | | | |
| | |  | 100 | 39,8 | 101 | 23,3 | 23,2 |
| 120 | 39,8 | 103 | 22,2 | 20,9 | 3,70 | 3,04 | |
| 140 | 39,7 | 105 | 21,1 | 18,6 | 3,64 | 2,98 | |
| 160 | 39,7 | 108 | 20,0 | 16,3 | 3,58 | 2,91 | |
| 180 | 39,6 | 110 | 18,9 | 14,0 | 3,52 | 2,85 | |
| 200 | 39,6 | 113 | 17,8 | 11,7 | 3,46 | 2,78 | |
| 220 | 38,8 | 110 | 16,8 | 11,4 | 3,44 | 2,71 | |
| 240 | 38,0 | 108 | 15,9 | 11,1 | 3,41 | 2,63 | |
| 260 | 37,1 | 105 | 14,9 | 10,8 | 3,39 | 2,56 | |
| 280 | 36,3 | 103 | 14,0 | 10,5 | 3,36 | 2,48 | |
| 300 | 35,5 | 101 | 13,0 | 10,2 | 3,34 | 2,41 | |

Heavy Load Corbels "SLK-ALU-TR", "SLK-ALU-TQ", "SLK-ALU-TTR", "SLK-ALU-TTQ"

Performance

Characteristic structural resistances C_k for the serviceability limit state (SLS) of SLK-ALUTTQ

Annex C18